


APPLICATION

Fully lugged ductile iron Butterfly Valve with bonded EPDM liner and stainless steel trim, fitted with gear operator for infinitely variable settings and stainless steel memory stop feature (DRV) to precisely set and retain the desired maximum opening position differential pressure. Once set, the valve can be closed and re-opened accurately to the pre-set differential pressure.

Commercially attractive option compared to traditional Globe-style Double Regulating Valves. Space saving and easier to support when weight is a concern. Available in large sizes up-to and including 600mm diameter. To measure ΔP , Pressure/Temperature plugs are to be installed in the pipework on either side of the valve.

SPECIFICATION

Body:	Ductile Iron
Disc, Pin & Stem:	Stainless Steel
Seat:	Vulcanised EPDM
Operation:	Gearbox in Ductile Iron
Coating:	RAL 5015 (thickness 250 micron)
Standard:	BS EN 593
Dimensions:	Face-to-Face BS EN 558 (series 20)
Type:	<ul style="list-style-type: none"> • Drilling: PN25 • Shaft: SS AISI 431/630 • Thread: Metric
Tests:	Inspected acc. to BS EN 12266-1 & European PED #2014/68/EU, 15/05/2014, CE marked
Size:	Standard 65mm—600mm
Temperature Range:	-15 to 120 °C
Max. Working Pressure:	25 Bar

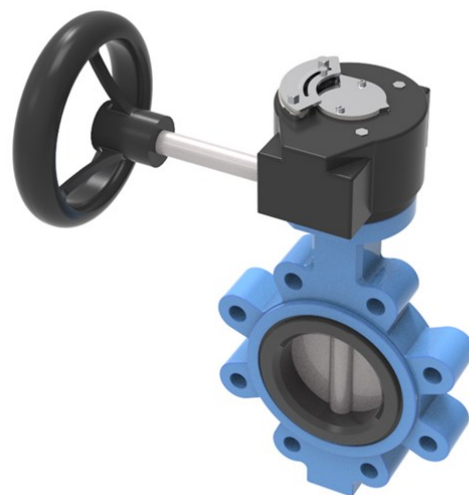

FEATURES AND BENEFITS


- Robust ductile iron Butterfly Valve for long service life
- Easy to install and operate fully lugged gear operated Butterfly Valve
- Easy to set, positive position and reset memory stop feature
- Light weight and low cost
- Smaller [40/50mm] and larger [700/800mm] sizes available on request

PRODUCT CODES AND DIMENSIONS


Product Code	Size (DN)	H*	H1*	H3*	ØD2	N-M	C*	F*	ØV-V*	Kg	OTV (N.m)	BTV (N.m)	Gearbox		
													OT N-M	Ratio	N° of turns
LUGN50065MDVEPV2529DRV	65	140	94	-	145	8-M16	65	154	135	11	26	86	200	24:1	6
LUGN50080MDVEPV2529DRV	80	145	105	-	160	8-M16	65	154	135	11.6	35	86	200	24:1	6
LUGN50100MDVEPV2529DRV	100	160	126	-	190	8-M20	65	154	135	15.3	60	169	200	24:1	6
LUGN50125MDVEPV2529DRV	125	170	140	-	220	8-M24	65	154	135	19.8	93	291	200	24:1	6
LUGN50150MDVEPV2529DRV	150	190	151	-	250	8-M24	65	154	135	20.5	153	291	200	24:1	6
LUGN50200MDVEPV2529DRV	200	220	183	-	310	12-M24	77	225	285	33.1	288	992	500	32:1	8
LUGN50250MDVEPV2529DRV	250	260	217	-	370	12-M27	77	225	285	56.5	485	1360	500	32:1	8
LUGN50300MDVEPV2529DRV	300	290	252	-	430	16-M27	80	215	285	77.2	735	1563	1200	50:1	12.5
LUGN50350MDVEPV2529DRV	350	320	285	-	490	16-M30	80	215	285	96.2	938	2356	1200	50:1	12.5
LUGN50400MDVEPV2529DRV	400	356	325	271	550	16-M33	121	256	285	142.1	1269	3928	2.5x103	560:1	140
LUGN50450MDVEPV2529DRV	450	387	384	271	600	20-M33	121	256	285	218.6	1697	5072	2.5x103	560:1	140
LUGN50500MDVEPV2529DRV	500	424	392	271	600	20-M33	121	256	285	290.6	2147	6788	2.5x103	560:1	140
LUGN50600MDVEPV2529DRV	600	524	455	330	770	20-M36	130	285	385	458.6	3452	10780	4x103	506:1	140

*Dimensions are in mm. OTV: Operation Torque Value. BTV: Breaking Torque Value. Precise gear box measurements are available in the component data sheets.

DN 65 - 350

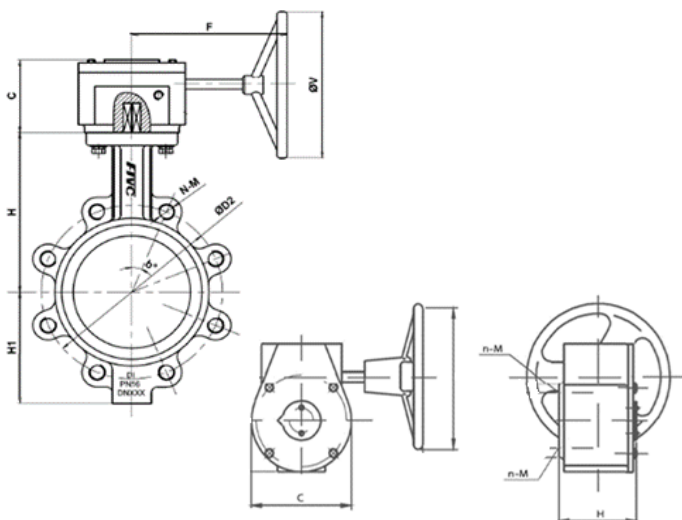



DN 400-600

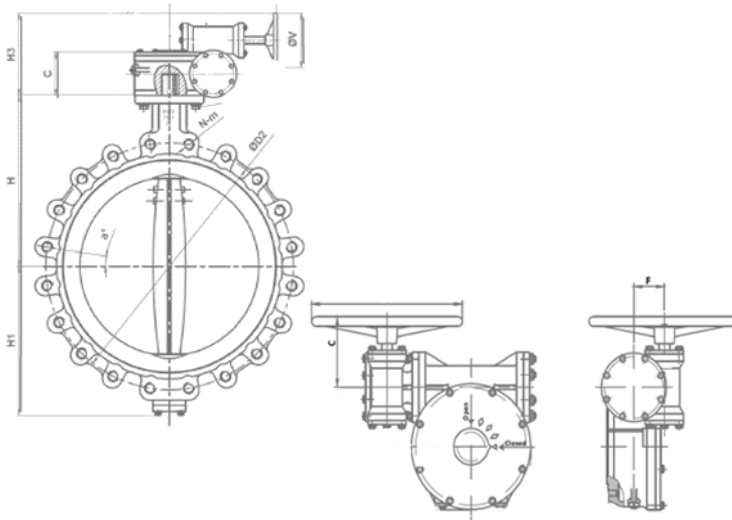

SELECTIONS



65mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 1.0 – 19.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

80mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 2.0 – 30.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

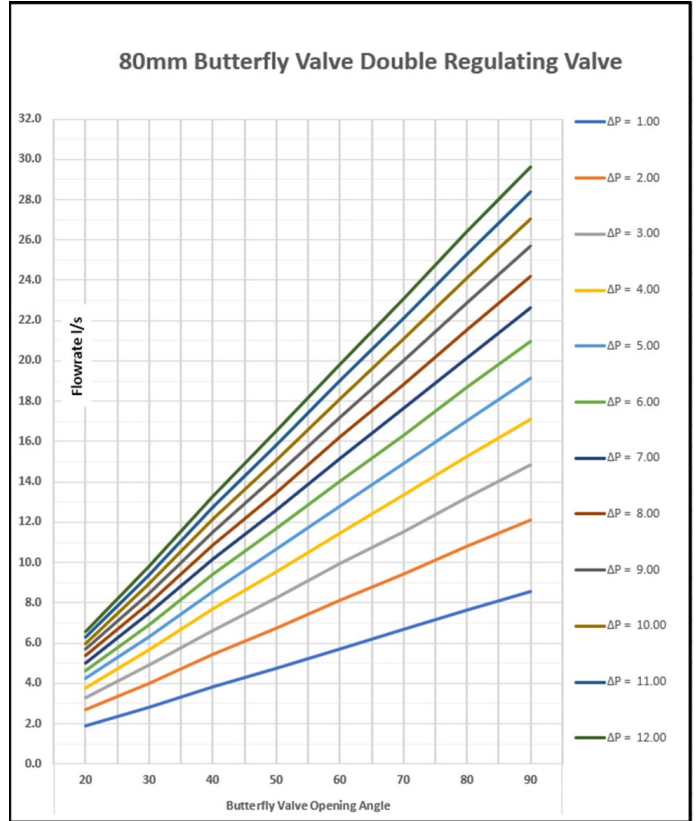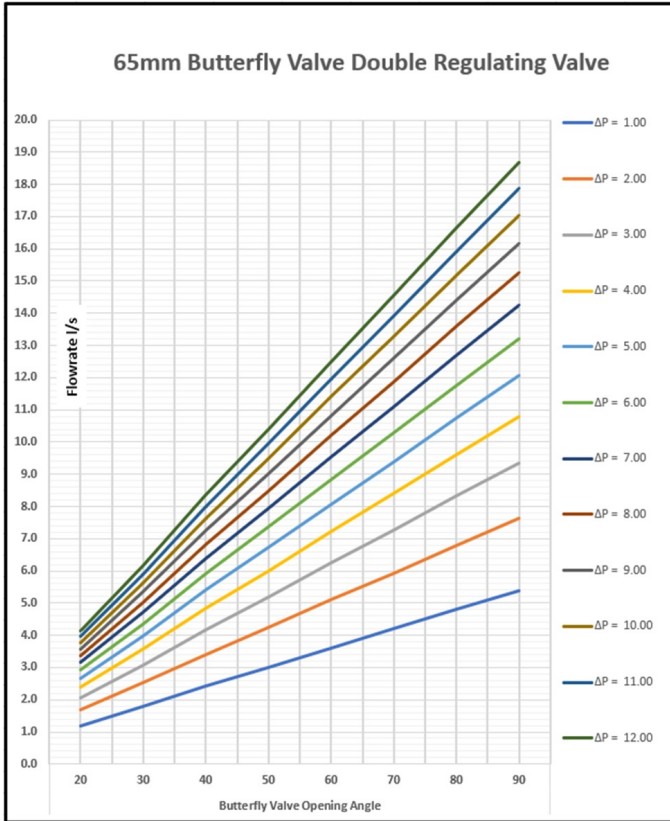

100mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 3.0 – 54.0 l/s
 ΔP range: 1.0 – 12.0 Kpa



125mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 5.0 – 87.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

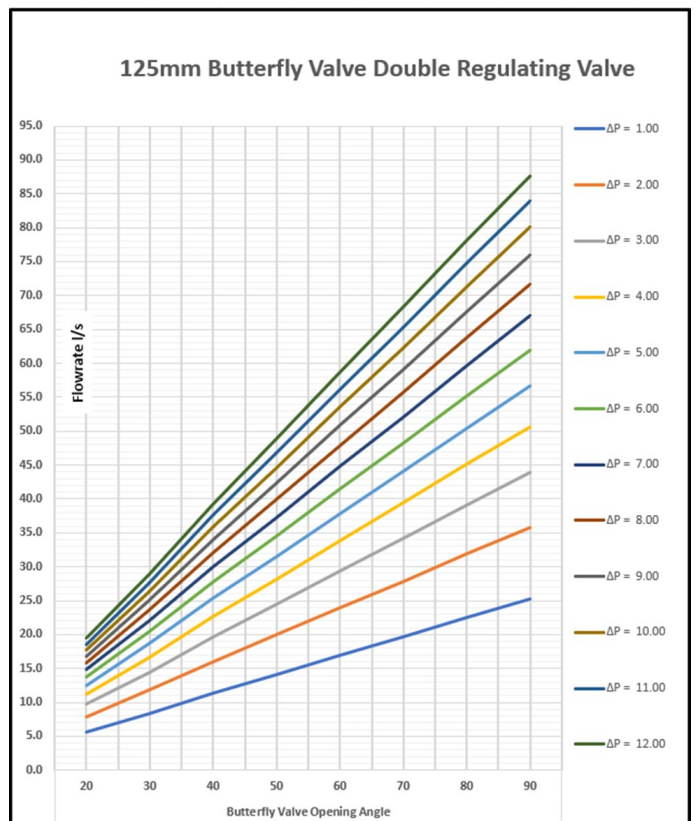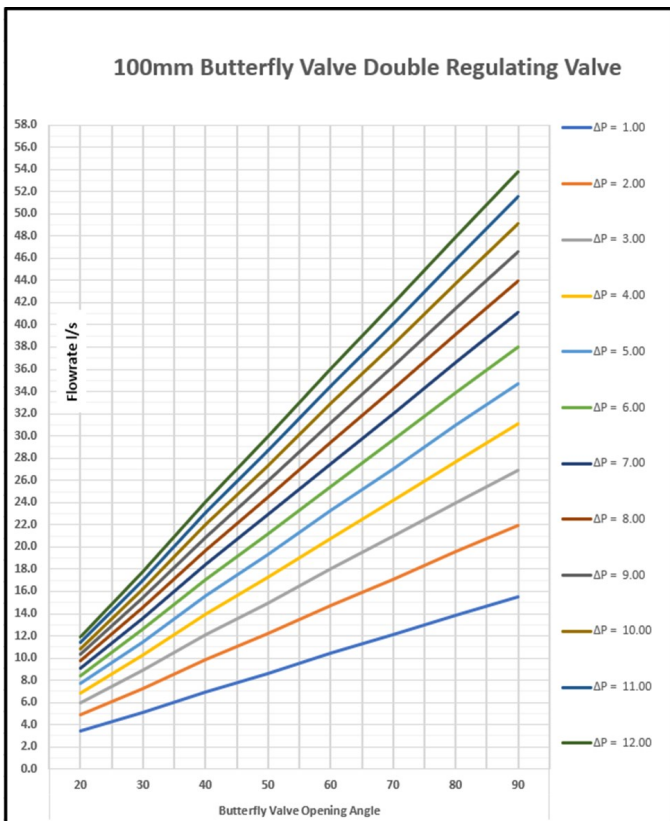

SELECTIONS



150mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 10.0 – 135.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

200mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 15.0 – 255.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

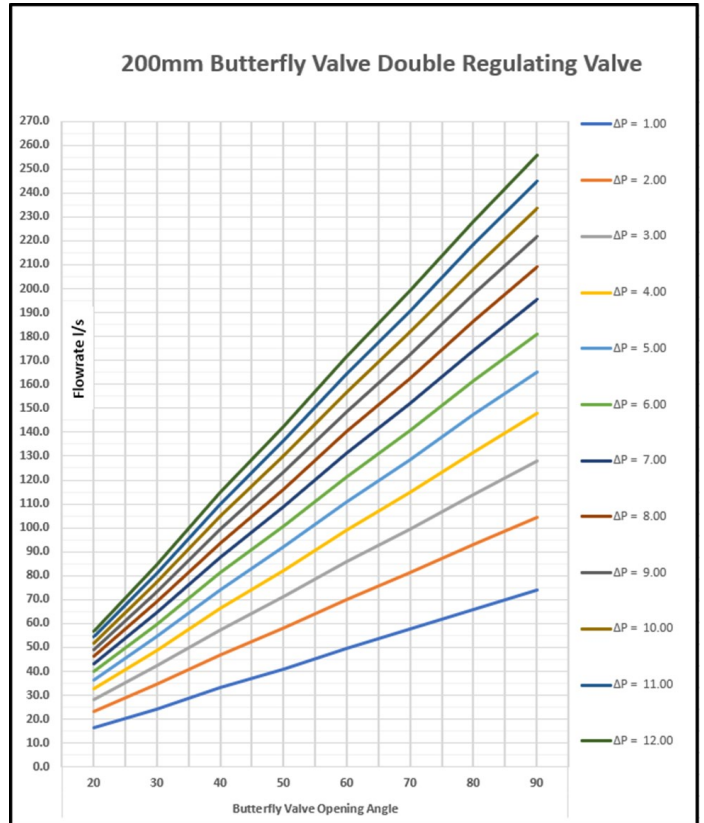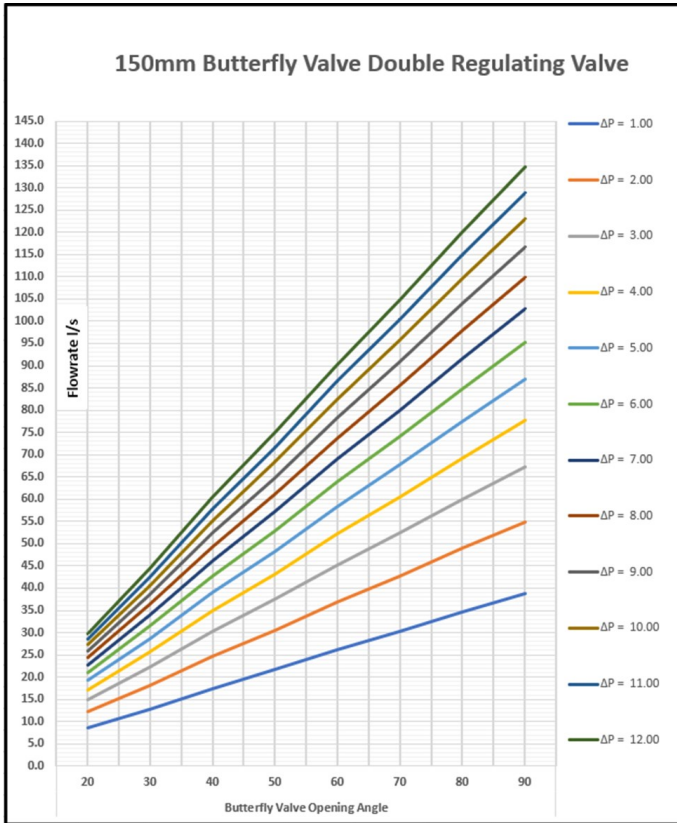

250mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 25.0 – 400.0 l/s
 ΔP range: 1.0 – 12.0 Kpa



300mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 45.0 – 625.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

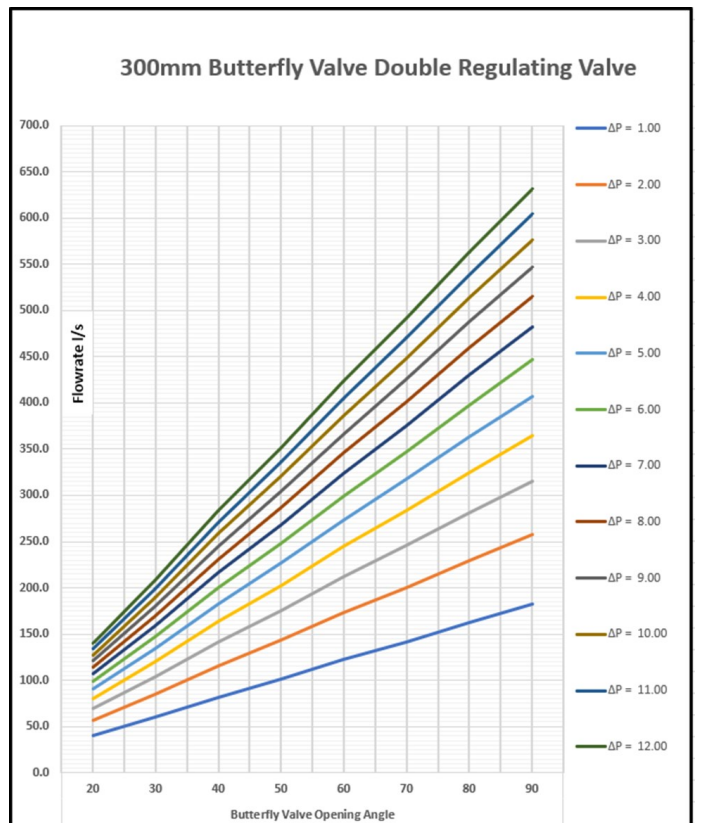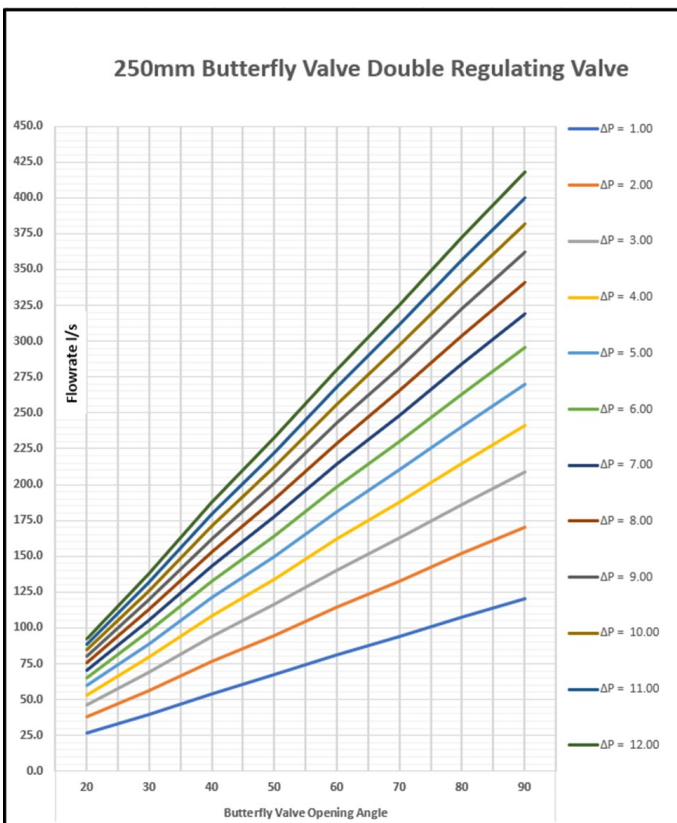

SELECTIONS



350mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 50.0 – 900.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

400mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 100.0 – 1200.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

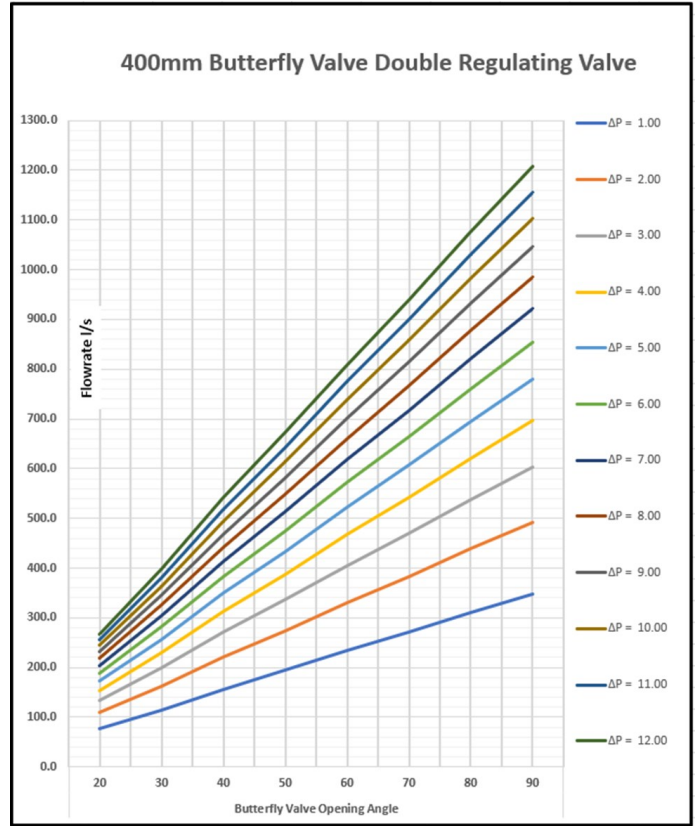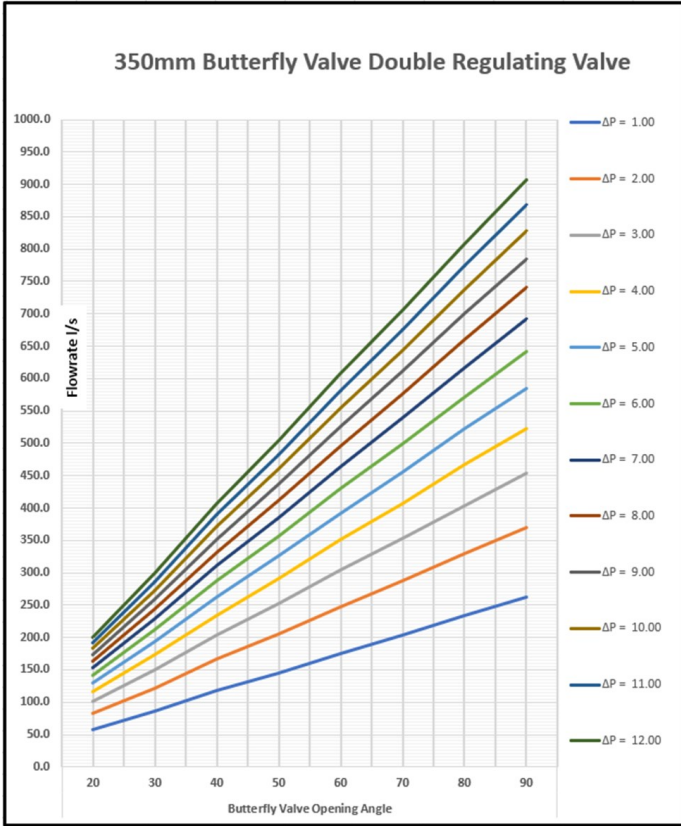

450mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 100.0 – 1500.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

500mm Butterfly Valve Double Regulating Butterfly Valve
 Flow range: 130.0 – 1900.0 l/s
 ΔP range: 1.0 – 12.0 Kpa

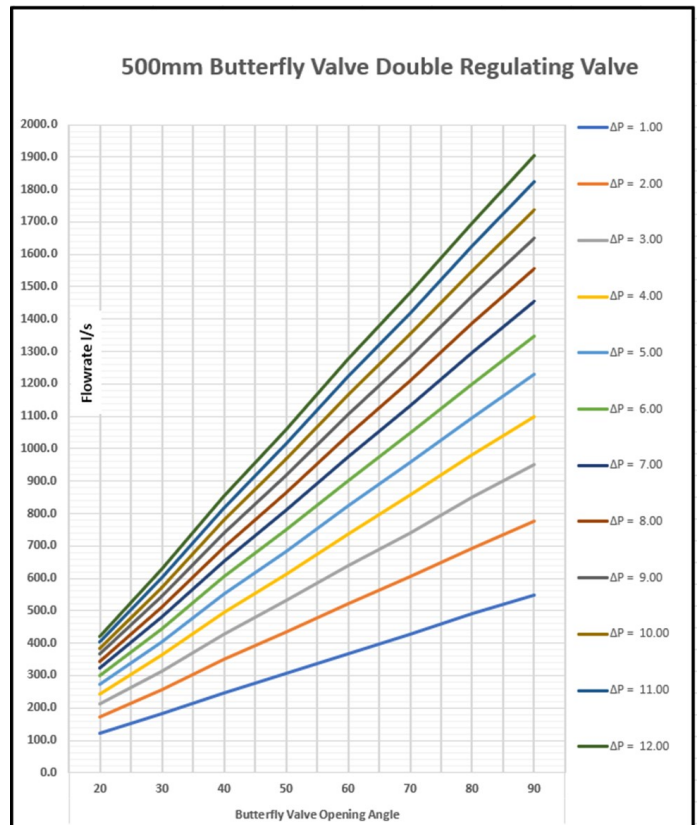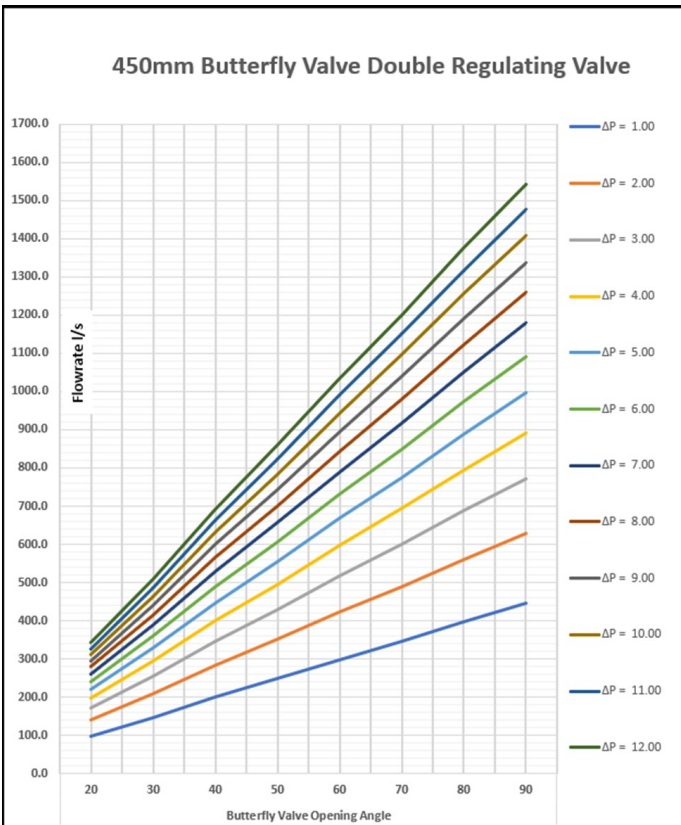

SELECTIONS

600mm Butterfly Valve Double Regulating Butterfly Valve

Flow range: 200.0 – 2800.0 l/s

ΔP range: 1.0 – 12.0 Kpa

